


N71-11898

NASA TECHNICAL
MEMORANDUM



NASA TM X-2087

NASA TM X-2087

CASE FILE
COPY

DESCRIPTION OF SERT II SPACECRAFT AND MISSION

*by Richard G. Goldman, Guy S. Gurski,
and William H. Hawersaat*

*Lewis Research Center
Cleveland, Ohio 44135*

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION • WASHINGTON, D. C. • NOVEMBER 1970

1. Report No. NASA TM X-2087	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle DESCRIPTION OF SERT II SPACECRAFT AND MISSION		5. Report Date November 1970	
		6. Performing Organization Code	
7. Author(s) Richard G. Goldman, Guy S. Gurski, and William H. Hawersaat		8. Performing Organization Report No. E-5807	
9. Performing Organization Name and Address Lewis Research Center National Aeronautics and Space Administration Cleveland, Ohio 44135		10. Work Unit No. 704-00	
		11. Contract or Grant No.	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D. C. 20546		13. Type of Report and Period Covered Technical Memorandum	
		14. Sponsoring Agency Code	
15. Supplementary Notes			
16. Abstract <p>This report is a description of the SERT II spacecraft and its mission. The mission purpose and the orbital flight plan to accomplish this purpose are discussed. The SERT II objectives are to prove the reliability and endurance capability of an ion thruster, develop and refine operational procedures, ascertain operating characteristics in the space environment, and validate ground test results. A mission objective of 6 months of continuous operation of one thruster system is expected to be achieved by a flight program stressing the use and application of reliable, space-proven components and design philosophies.</p>			
17. Key Words (Suggested by Author(s)) Spacecraft Electric propulsion SERT II		18. Distribution Statement Unclassified - unlimited	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 24	22. Price* \$3.00

*For sale by the Clearinghouse for Federal Scientific and Technical Information
Springfield, Virginia 22151

DESCRIPTION OF SERT II SPACECRAFT AND MISSION

by Richard G. Goldman, Guy S. Gurski, and William H. Hawersaat

Lewis Research Center

SUMMARY

This report is a description of the SERT II spacecraft and its mission. The mission purpose and the orbital flight plan to accomplish this purpose will be discussed. The SERT II objectives are to prove the reliability and endurance capability of an ion thruster, develop and refine operational procedures, ascertain operating characteristics in the space environment, and validate ground test results. A mission objective of 6 months of continuous operation of one thruster system is expected to be achieved by a flight program stressing the use and application of reliable, space-proven components and design philosophies.

INTRODUCTION

The SERT II project was undertaken to substantiate the reliability and endurance capability of an ion thruster in the space environment, to demonstrate the compatibility of a thruster system capable of space missions with its associate spacecraft systems, to develop and refine operational procedures, to ascertain operating characteristics in the space environment, and to validate ground tests. A minimum mission time of 6 months was chosen as a suitable compromise among the life expectancy of flight-proven hardware, a continuous sunlight orbit, and operating time on a single thruster long enough to be extrapolated to even longer missions such as would be required in powered flight to the other planets (refs. 1 to 3).

The SERT II satellite was launched from Vandenberg Air Force Base on February 3, 1970. This report describes the requirements of the mission, the orbit chosen to meet these requirements, and the spacecraft in general, including experiments, power system, telemetry, command, and attitude control.

BACKGROUND

Establishment of the characteristic operating life of the thruster is the primary objective of the SERT II mission because it is characteristic long operating life that transforms the ion thruster from a laboratory device to a useful space thruster system. The test objective of 6 months was selected as a compromise between future mission requirements and the cost, complexity, and organization available.

Also of significant importance is the validation of ground testing provided by a space flight. The more confidence that can be generated in simplified ground testing, the more money can be saved by obviating the necessity of endurance tests in the actual space environment. This saving also reflects in the elimination of effort required in running ion thrusters in large space simulation chambers.

Potential users of ion thrusters must be in possession of the specialized techniques necessary to develop and operate them. The ground work for these specialized techniques has been established through the SERT I and SERT II flight programs (refs. 4 to 9).

Finally, the actual operating characteristics of the ion thruster, as affected by the space environment, cannot be accurately determined except in space (refs. 10 and 11).

Mission Requirements

The mission requirements followed from the decision that the smallest thruster which would adequately demonstrate the operating parameters and endurance characteristics of this type of engine was a 1-kilowatt unit. Taking into account the solar array degradation and spacecraft housekeeping functions, an initial, on-orbit power of 1500 watts was required. To power the thruster continuously requires a solar array flown in a 6-month constant sunlight orbit. Sun synchronous orbits are essentially polar orbits. Constant sunlight is achieved by selecting the orbit altitude and inclination such that the oblateness of the Earth, that is, the belt of extra mass distribution in the equatorial region, precesses the orbit plane at approximately 1° per day, that is, the angular rate at which the Earth moves around the Sun. An on-orbit altitude of 1000 kilometers was selected as the result of an optimization of gravity gradient torques, aerodynamic drag, solar cell degradation, required constant sunlight, and launch vehicle limitations.

The use of flight-proven hardware was an important ground rule laid down for the SERT II mission. Table I lists components derived from previous missions. In many cases, identical units were purchased from the manufacturer to the original specifications and drawings. In the assembly of the experimental and prototype spacecraft, some actual surplus hardware was obtained from the project concerned. From the list it can be seen that considerable usage was made of previous designs. Although this resulted in

TABLE I. - LIST OF COMPONENTS HAVING
PREVIOUS FLIGHT HISTORY

Components used in SERT II	Flight vehicle
dc-ac inverter	Agena
Switching mode regulator	LEM
Phase sensitive demodulators	LEM
Battery charger	Agena
Battery	Mariner
Command decoder	ISIS
Command receiver	Pegasus
Transmitter	FR-1
Hybrid	Pegasus
Diplexer	Pegasus
Tape recorder	Air Force program
Subcommutator	BIOS
Multicoder	BIOS
Frequency division multiplexer	BIOS
Time code generator	BIOS
dc-dc converter	Agena
Backup acquisition system	Surveyor and Lunar Orbiter
Control moment gyroscopes	Agena
Solar array	Air Force program
Miniature electrostatic accelerometer	Saturn
Horizon scanner	Agena

significant cost savings, the most important factor gained was confidence in the reliability of the hardware based on its previous flight history.

The Thorad-Agena was the launch vehicle. An advantage of the Agena vehicle is that it could be modified to support the SERT II mission with the large required solar array. The SERT-Agena, together with the spacecraft support unit (SSU) and spacecraft (SC), provides excellent moments of inertia for gravity gradient control.

A study indicated that the thermal control system could be obtained by entirely passive means using thermal coatings on the outer surfaces of the SC and SSU.

Flight Sequence

As indicated in the previous section, a 1000-kilometer constant sunlight orbit was desirable to meet mission objectives. The Thorad vehicle was, therefore, launched from the Western Test Range, which is the most efficient site from which to achieve a polar orientation. The Thorad burn plus first Agena burn put the satellite into an elliptical

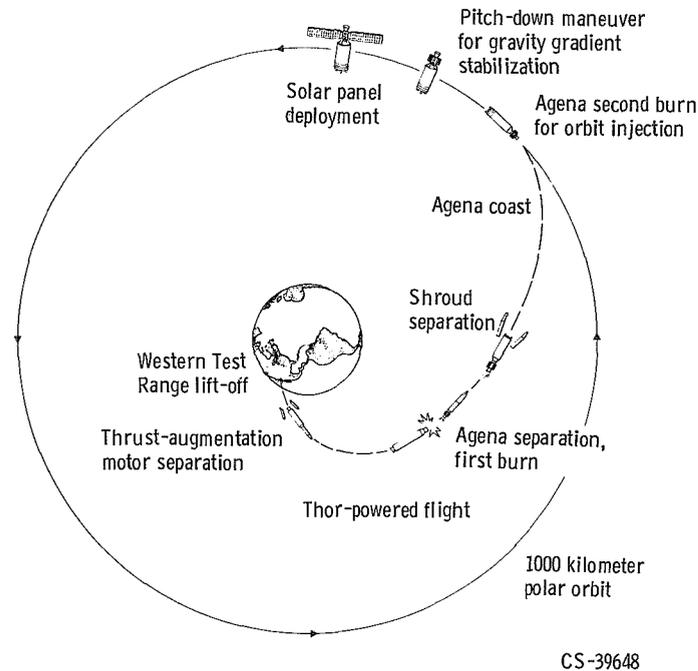


Figure 1. - Representation of Sert II flight sequence.


transfer trajectory to 1000-kilometers, where a second burn of the Agena circularized the orbit. Figure 1 is a diagram of the injection procedure. The Agena vehicle attitude control system oriented the satellite nose down with the thrusters pointed toward Earth.

The ion thrusters, as operated in orbit, are offset by 10^0 from the vertical. This offset results in enough tangential thrust to raise or lower the orbit altitude, depending on thruster selected. This altitude change is approximately 100 kilometers during the 6-month period. The orbit raising, which directly modifies orbit period, provides a direct measurement of integrated thrust. Real-time thrust was measured by a miniature electrostatic accelerometer.

SATELLITE DESCRIPTION

General

The SERT II configuration is shown in figure 2. The satellite is 1.525 meters in diameter and 7.92 meters long and weighs 1435 kilograms. Six meters of solar array extend outward on both sides of the Agena aft end equipment rack. As depicted in figure 2, the ion thrusters are pointed Earthward with the main bulk of the satellite being the empty Agena. Attached to the forward end of the Agena is the SSU. The SSU pro-

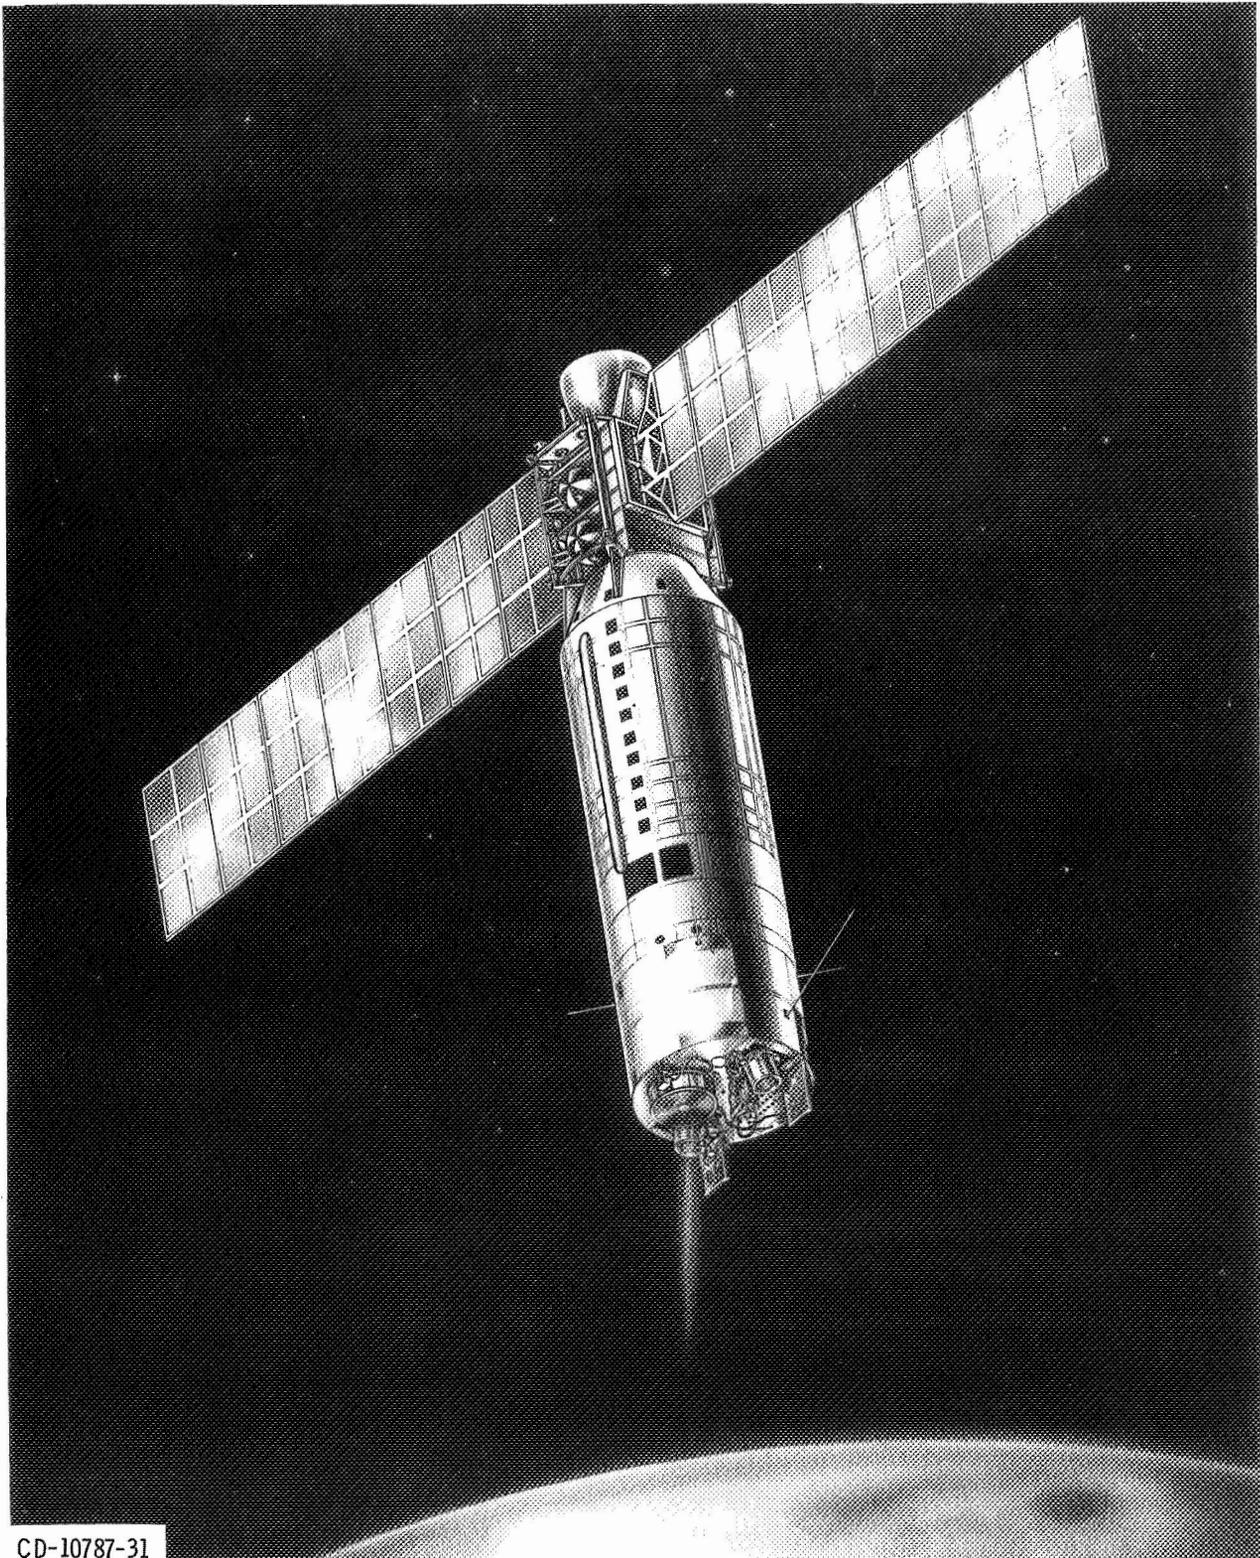

CD-10787-31

Figure 2. - SERT-II in orbit.

vides power conditioning, switching, telemetry, and command systems. The primary attitude control system components are also in the SSU.

Forward of the SSU is the spacecraft (SC), which houses the prime ion thruster experiment, together with all associated experiments.

The general weight breakdown for each major assembly follows:

	Weight, kg
Spacecraft	282
Spacecraft support unit	220
Agena launch vehicle	740
Solar array	193
	<u>1435</u>

Spacecraft Construction

Identified by the two protruding thrusters, the SC provides support and protection for the various experiments. A completely redundant pair of ion thrusters is carried, each with its own power conditioning unit. Each thruster is mounted on gimbals so that the thrust vector can be adjusted on orbit through the center of mass of the satellite, thereby minimizing disturbance torques from this source. Several associated experiments are carried; a space probe to measure spacecraft potentials, motor-driven beam probes which are swept through the ion beam on command to measure the beam potential, surface contamination experiments (solar cells held at 71° and -43° C) to determine contaminating efflux from the operating thruster, a radiofrequency interference experiment (RFI) to measure any noise generated by the ion thruster in selected radio bands (these bands will be used by interplanetary and orbiting spacecraft), and finally, a miniature electrostatic accelerometer (MESA) which measures the very small acceleration of the satellite caused by the thrust of the ion engine.

Additional components satisfy the basic requirements for power switching, conditioning, and instrumentation. Spacecraft attitude is measured by horizon scanners. A backup acquisition system (BACS) is provided for reacquisition should orientation be lost.

The basic shape of the spacecraft is a right circular cylinder 53.4 centimeters high and 149 centimeters in diameter. Figure 3 shows the configuration and general construction technique. The component access plates form the skin of the spacecraft. Three of the skins are aluminum rather than the lighter magnesium because of improved compatibility of aluminum with the Z-93 thermal coating used. Magnesium alloy is used for five


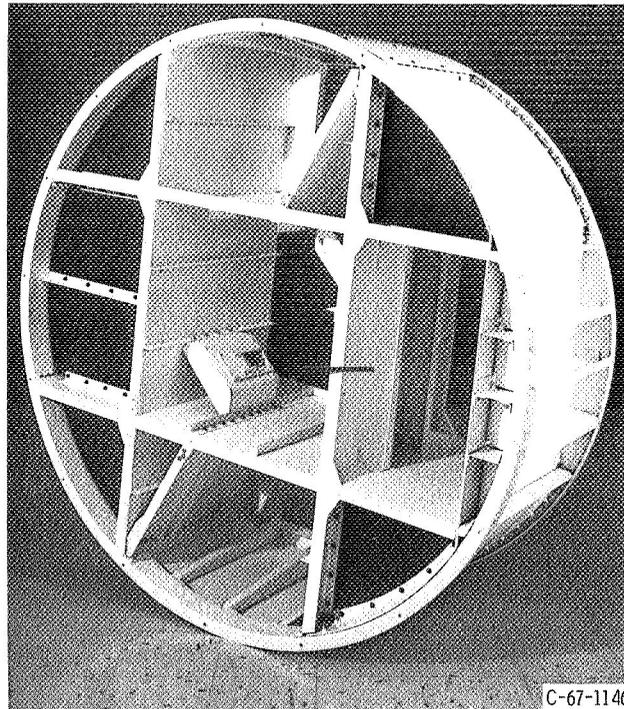


Figure 3. - Spacecraft structure.

outer skins to save weight. The power conditioning units are mounted on an aluminum radiator which forms an integral part of the spacecraft structure. The spacecraft component locations are shown in figures 4 to 7.

Spacecraft Support Unit Construction

The SSU structure is very similar in construction, size, and appearance to the spacecraft, with the power conditioning radiator being the exception. Seven trays are used in the SSU for conventional component mounting, whereas the spacecraft requires structural adaptation for supporting the large experiments. Thermal control patterns are similar for both spacecraft and SSU. All component access areas are covered with skins similar to that on the spacecraft. Three skins have a Z-93 paint and five have perforated aluminum tape. The SSU receives power from the solar array, and with its power system, regulates and controls the housekeeping functions. The thruster power from the array passes through the SSU to the spacecraft power conditioners. The SSU also provides the telemetry and command functions required. It houses in its center section a control moment gyro package which orients the satellite in one axis and provides damping for all axes.

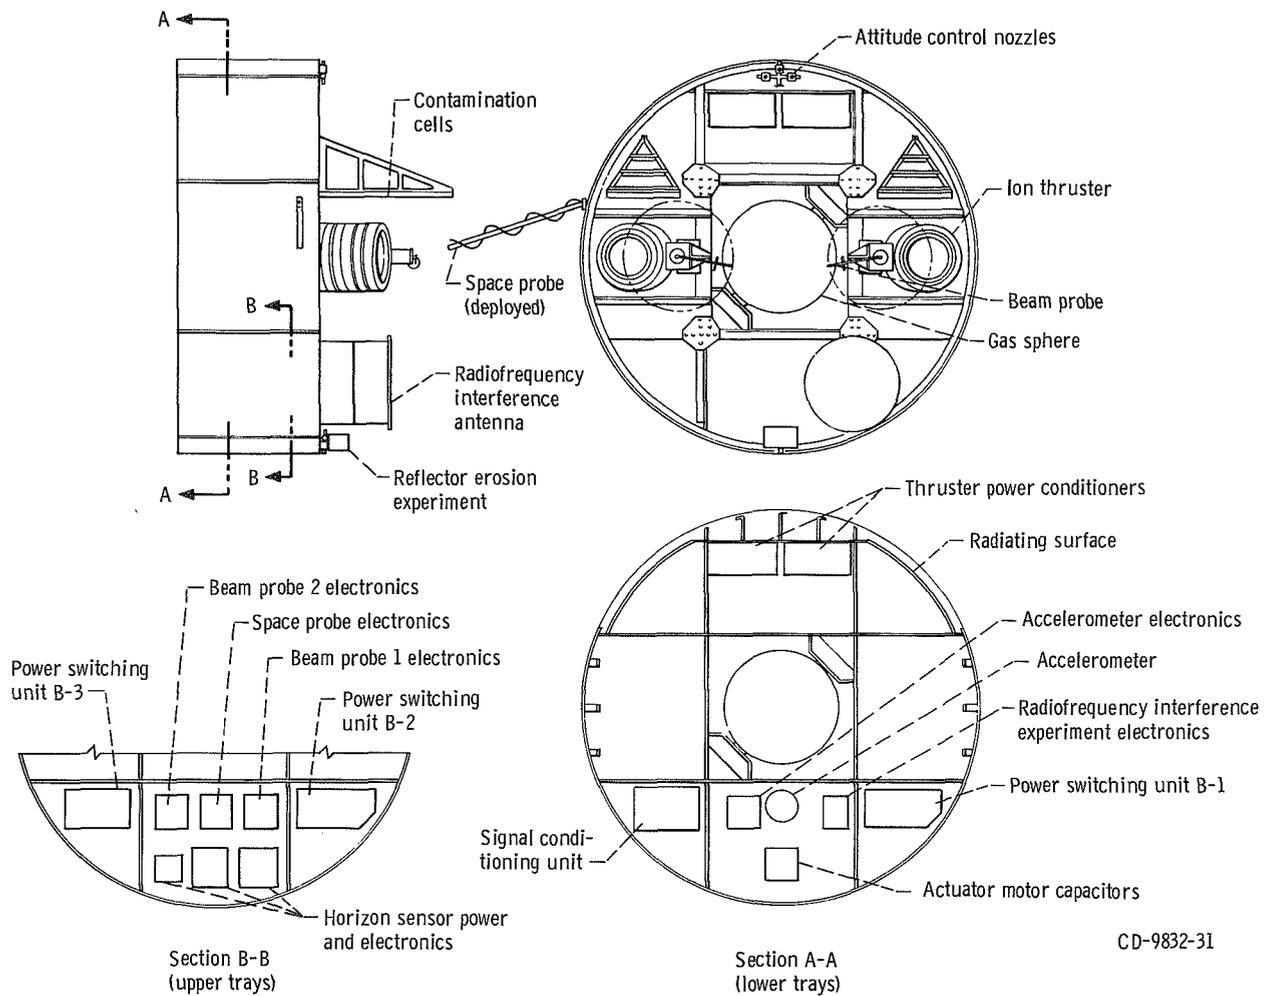

CD-9832-31

Figure 4. - General arrangement of spacecraft.

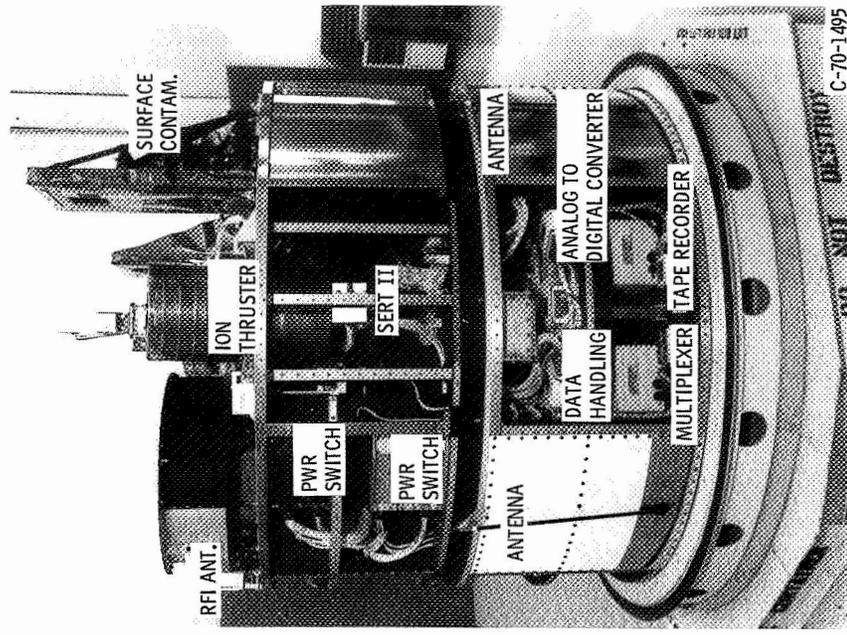


Figure 6. - Bay 2 of spacecraft and spacecraft support unit.

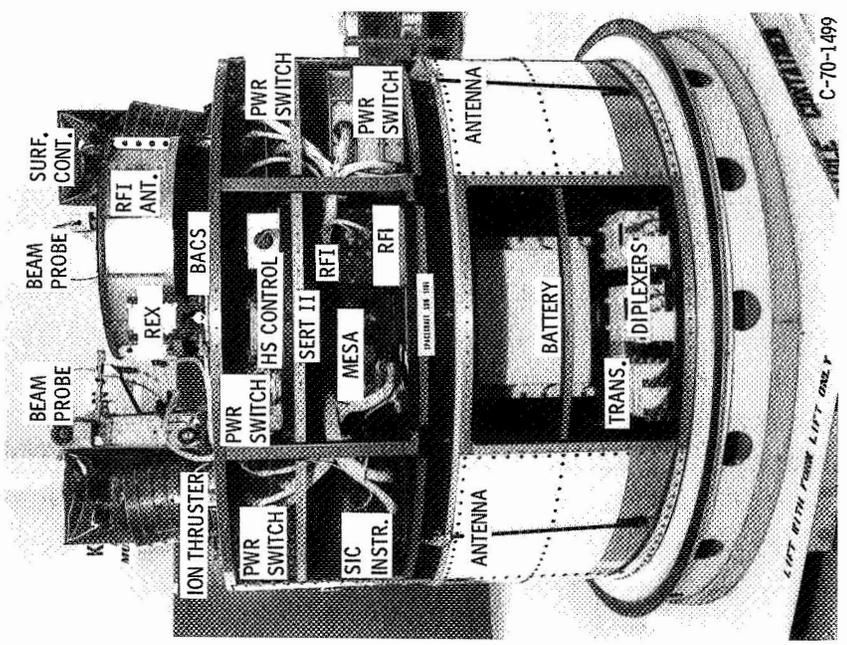


Figure 5. - Bay 8 of spacecraft and spacecraft support unit.

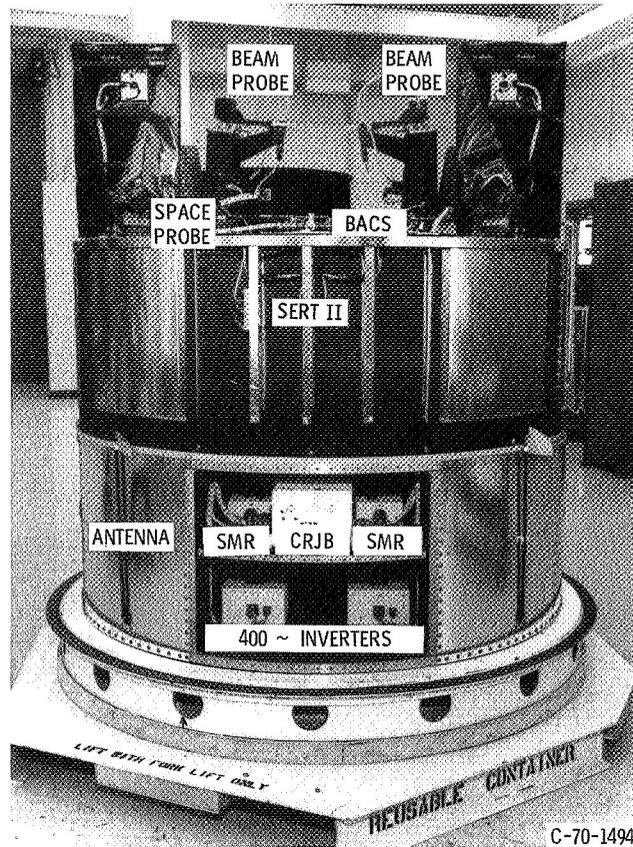


Figure 7. - Bay 4 of spacecraft and spacecraft support unit.

Spacecraft support unit component layout is shown in figures 5 to 8.

Launch Vehicle

The Agena is modified to serve as a spacecraft support platform. It has large mass distributions which provide favorable moments of inertia for gravity gradient stabilization. The SERT II Agena is 6.25 meters long by 1.525 meters in diameter, with a modified aft equipment rack which supports and thermally protects the solar array.

Once orbit is achieved, the Agena performs several key functions: (1) pointing the spacecraft Earthward, (2) deploying the large solar array, (3) placing the SSU battery on line, (4) dumping of all propellants aboard the vehicle, (5) maintaining proper attitude during this sequence, and (6) (upon ground command) switching horizon scanners to spacecraft control for attitude determination.

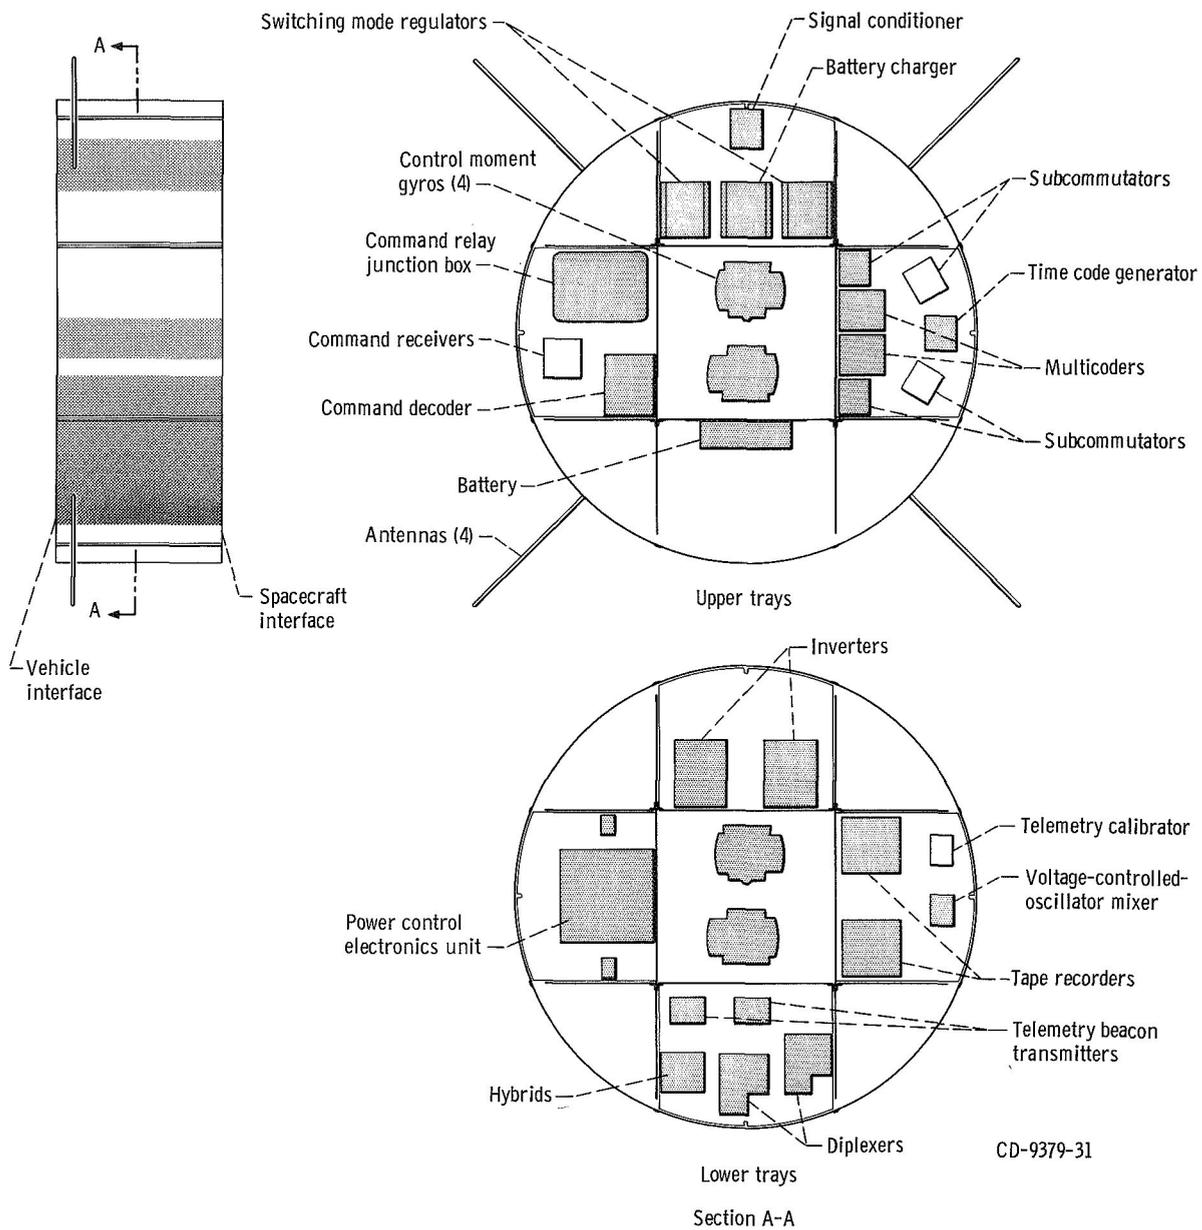


Figure 8, - General arrangement of spacecraft support unit.

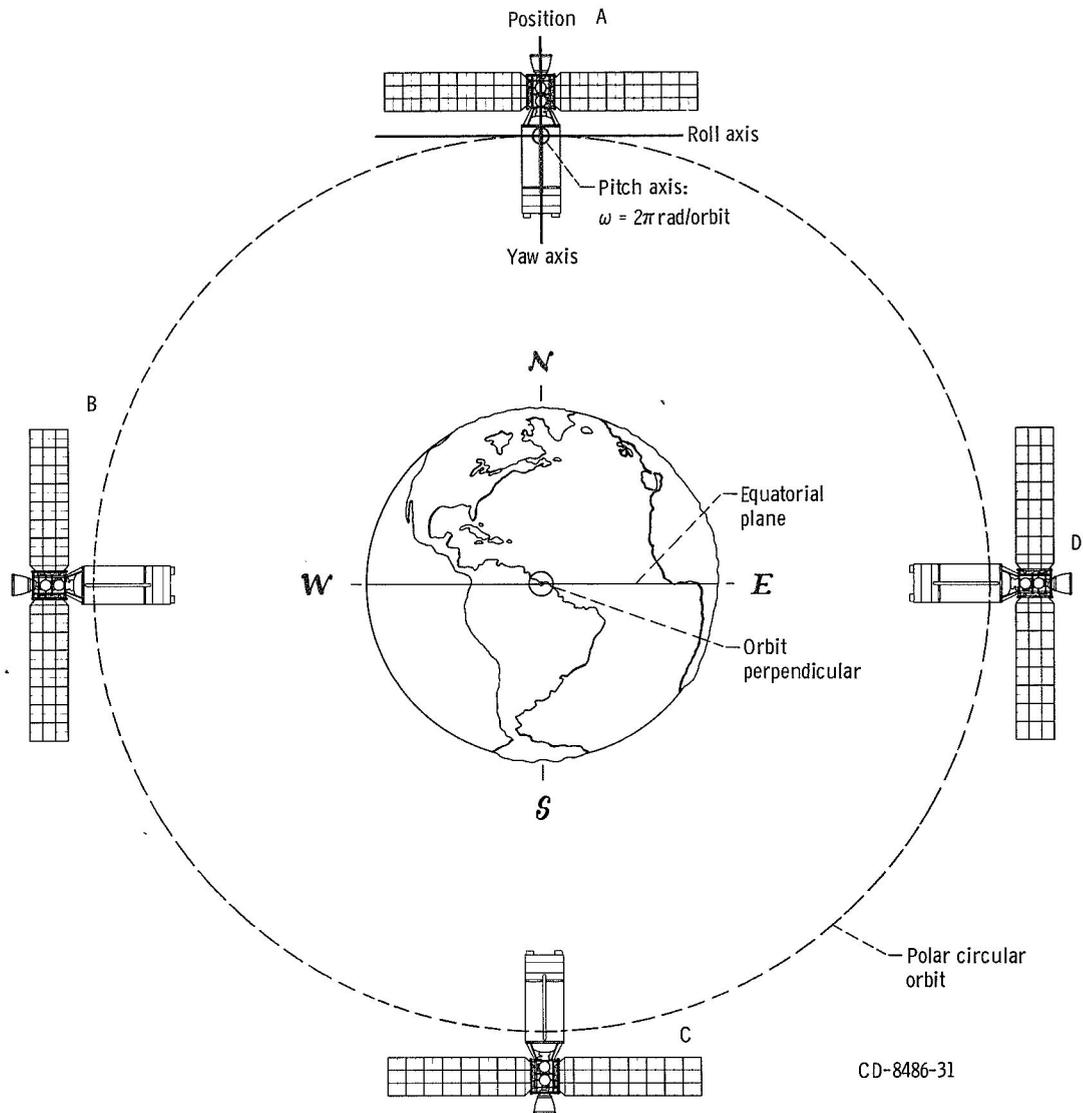


Figure 9. - SERT-II circling Earth.

Attitude Control

The orientation of the satellite, depicted in figure 9, is maintained in pitch and roll by gravity gradient and in yaw by gravity augmented by the control moment gyroscopes (CMG). The satellite weighs 1435 kilograms and has a mass distribution similar to a bar bell, that is, idealized moments of inertia which result in an optimum gravity gradient orientation capability. Moments of inertia are as follows:

$I_{pitch}, (kg)(m^2)$	11 000
$I_{roll}, (kg)(m^2)$	8 600
$I_{yaw}, (kg)(m^2)$	2 750

Resultant gravity gradient restoring torques for small angles are

$T_{pitch}, (kg)(m)/deg$	2.21×10^{-5}
$T_{roll}, (kg)(m)/deg$	5.25
$T_{yaw}, (kg)(m)/deg$.69

These restoring torques maintain the spacecraft orientation stably in conjunction with the CMG's, which provide additional stiffness in the yaw axis and the necessary damping in all three axes.

A backup attitude control system (BACS) is provided in case a temporary disturbance should cause the satellite to lose orientation. This BACS is a cold gas system which can reorient the spacecraft from disturbance rates up to 5° per second. Reacquisition is accomplished with an open loop, by commands timed and executed by ground control.

Thermal System

The SERT II satellite uses a passive thermal design because the satellite orientation with respect to the Sun and Earth is relatively constant. Extensive analysis, model tests, full scale tank tests, and experiments with coatings were employed in the thermal control design. This allowed the use of thermal coatings only (Z-93, black paint, polished aluminum, and perforated aluminum tape). The thermal control pattern limits solar and Earth thermal inputs and regulates the radiated output so that a satisfactory thermal environment is maintained for all components. The thruster power conditioners (PC's) are mounted on a large radiator which serves as part of the spacecraft structure. The thermal dissipation of the radiator requires that, when both PC's are off, radiator strip heaters be turned on to maintain an adequate thermal environment.

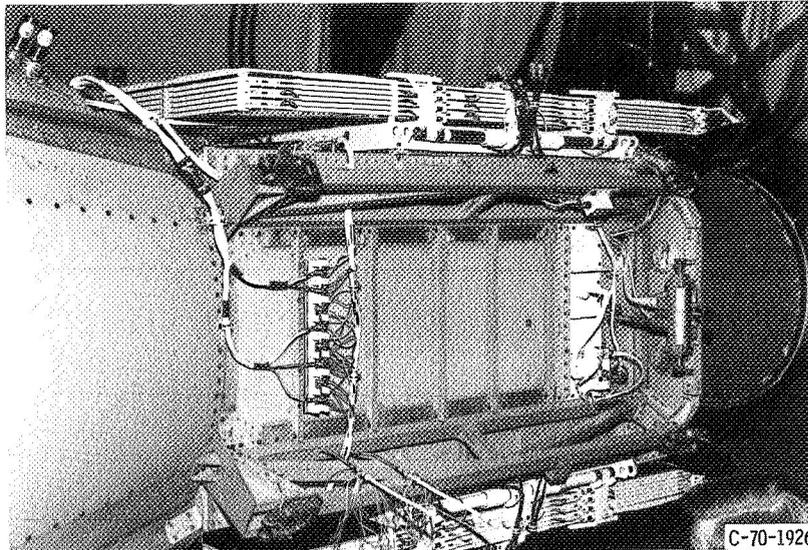


Figure 10. - Stowed solar array.

Power System

Solar array. - Rated at 1500 watts of usable power, the solar array is divided into two functional supplies, a 60-volt thruster section (1300 W) and a 35-volt housekeeping section (200 W). In the stowed position the array is attached to the rectangular truss work aft of the Agena tank section within the envelope of the Agena-Thorad adaptor. Figure 10 shows the stowed array.

Deployment of the array is accomplished by springs and a scissor mechanism. The array is fixed and so oriented on the orbital vehicle that, when deployed, it lies within the orbital plane facing the Sun. Figure 2 shows the array in the deployed position. The array has a length of 6 meters on each side of the Agena and a width of 1.525 meters. It provides an active area of 17.5 square meters.

Thermal control on the array is achieved by the use of tinted white acrylic lacquer on the back of the array and reflective coating on the cover glass on the front of the array, which maintain the array temperature between 40° and 60° C depending on its orientation.

The array employs a modular construction, the basic module being 36.2 by 45.7 centimeters. Each module is composed of a thin magnesium waffle plate to which are bonded 74 solar cell submodules. The submodules are composed of five individual 2- by 2-centimeter solar cells connected in parallel on a 2- by 10-centimeter metallic plate. The solar cells are 0.3-millimeter-thick N/P cells with a 2-ohm-centimeter base resistivity and 11 percent efficiency at air mass zero. Radiation and thermal protection is provided by 0.5-millimeter-thick quartz cover glass. Six of the basic modules are

incorporated into a panel which is 0.76 by 1.52 meters. The overall array consists of 90 modules. The panel structure to which the modules are attached is lightweight aluminum.

Power distribution. - The 60-volt section of the solar array provides power through motor driven switches to the ion thruster power conditioning system. The 35-volt section of the array is fed into switching mode regulators (SMR's) in the SSU for regulation and distribution. A block diagram of the power system is shown in figure 11.

Two SMR's provide regulated 26.5 volts dc to ± 1 percent. The main SMR supplies power to the spacecraft loads, inverters, battery charger, telemetry system, and signal conditioning. The standby SMR supplies power to the command system and transmitters. Diode connection of the main SMR to the standby SMR provides power to the command system and transmitters if the standby SMR fails. Command capability exists to use both or either of the two SMR's to supply the spacecraft and SSU loads or to bypass both SMR's and operate directly from the solar array.

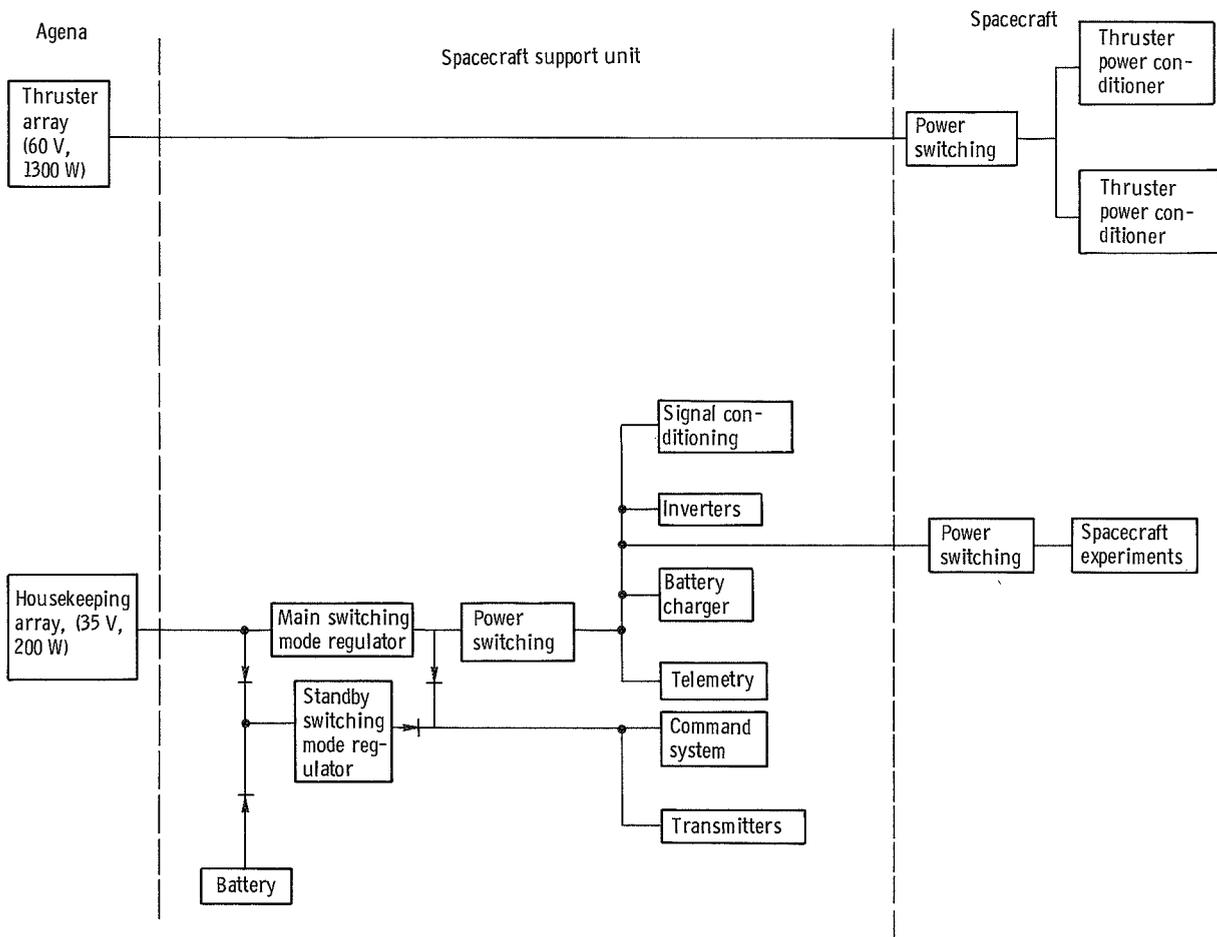


Figure 11. - SERT II power system.

Redundant 115-volts ac, 400-cycle inverters operating from the main SMR output provide power to any two of the four control moment gyroscopes in the SSU, to the beam probe actuators and thruster gimbal motors in the spacecraft, and to the Agena horizon sensors.

A 40-ampere-hour silver oxide - zinc battery capable of at least five discharge cycles is electrically back biased from the housekeeping solar array and is instantaneously available for emergency conditions. Should the SSU sense an undervoltage condition, the battery would come on line to support essential loads excluding the thrusters and experiments. A battery charger is provided to maintain charge status and recharge the battery should it be required.

Power switching for the telemetry and power systems is provided in the SSU while experiment switching is performed in the spacecraft. The command receivers and decoder cannot be switched off. All components in the spacecraft and SSU are fused. Undervoltage protection is provided to disable all systems except the command system and transmitter should the SMR regulated output drop below 23 volts dc for longer than 200 milliseconds. The ion thruster power conditioning would be disconnected from the thruster array should the housekeeping array drop below 23 volts for longer than 1 second.

Communication System

Telemetry. - The airborne telemetry system, together with the supporting ground station and communication network, forms a composite system which provides the Lewis control center with real-time telemetry and command verification data during periods of ground coverage. In addition, data storage capability via two on-board tape recorders is provided for periods when STADAN coverage is not available.

A simplified block diagram of the airborne telemetry system is shown in figure 12. Data from four subcommutators are fed into a multicoder, where the analog to digital conversion and time division multiplexing are accomplished. The pulse code modulated (PCM) multicoder output is then fed into a voltage-controlled oscillator (VCO) through a mixer and transmitted at 136 megahertz as a phase modulated (PM) signal (PCM/FM/PM).

Timing pulses for experiments and transmission of tape recorder playbacks and command verification are also provided.

Redundancy in the telemetry system is provided for the multicoder, VCO'S, mixer, tape recorder, and transmitter. Although the four subcommutators are not redundant, some key data are on two subcommutators and also data are allocated so that all data from one device are not on one subcommutator.

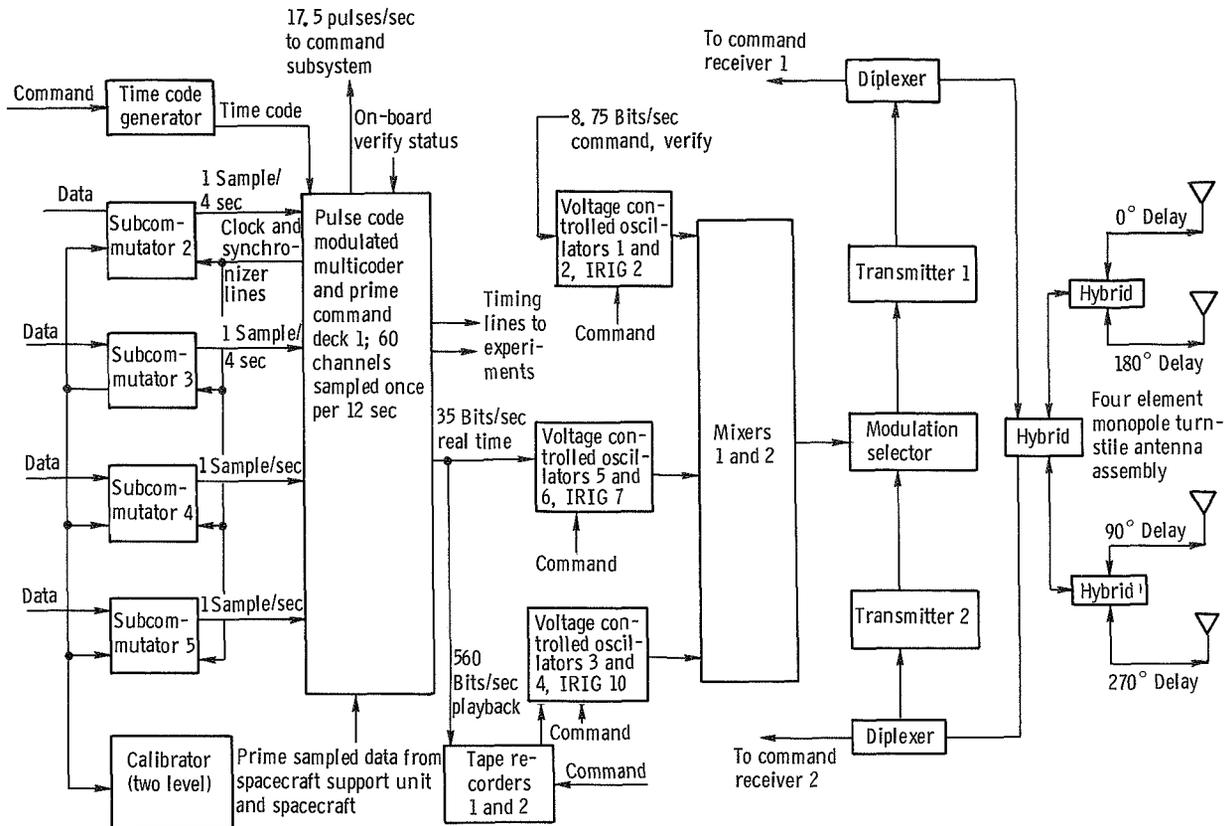


Figure 12. - Airborne telemetry subsystem. (Interrange instrumentation group, IRIG.)

Command system. - The airborne portion of the command system functions in conjunction with the tracking network to achieve real-time command control from the Lewis data control center. Figure 13 is a block flow diagram showing primary ground and spacecraft interfaces. Real-time commands are sent and executed by the operator at the ground station in contact with the spacecraft.

The command system is an amplitude modulated 148-megahertz system with a 216 command capability. Upon receipt of a command, the receiver aboard the spacecraft demodulates the radiofrequency signal and directs the command signal to the decoder, where the command received is identified, put in storage, and inserted in the telemetry output for transmission to the ground station. At the Lewis control center, the command is verified as the correct command and the STADAN operator is instructed to send an execute signal to the spacecraft.

Redundancy is provided in the command system by use of two command receivers operated in parallel and a command decoder consisting of two fully redundant decoder "halves", each capable of decoding 108 commands. All essential commands for the thruster experiment and key housekeeping systems are redundant.


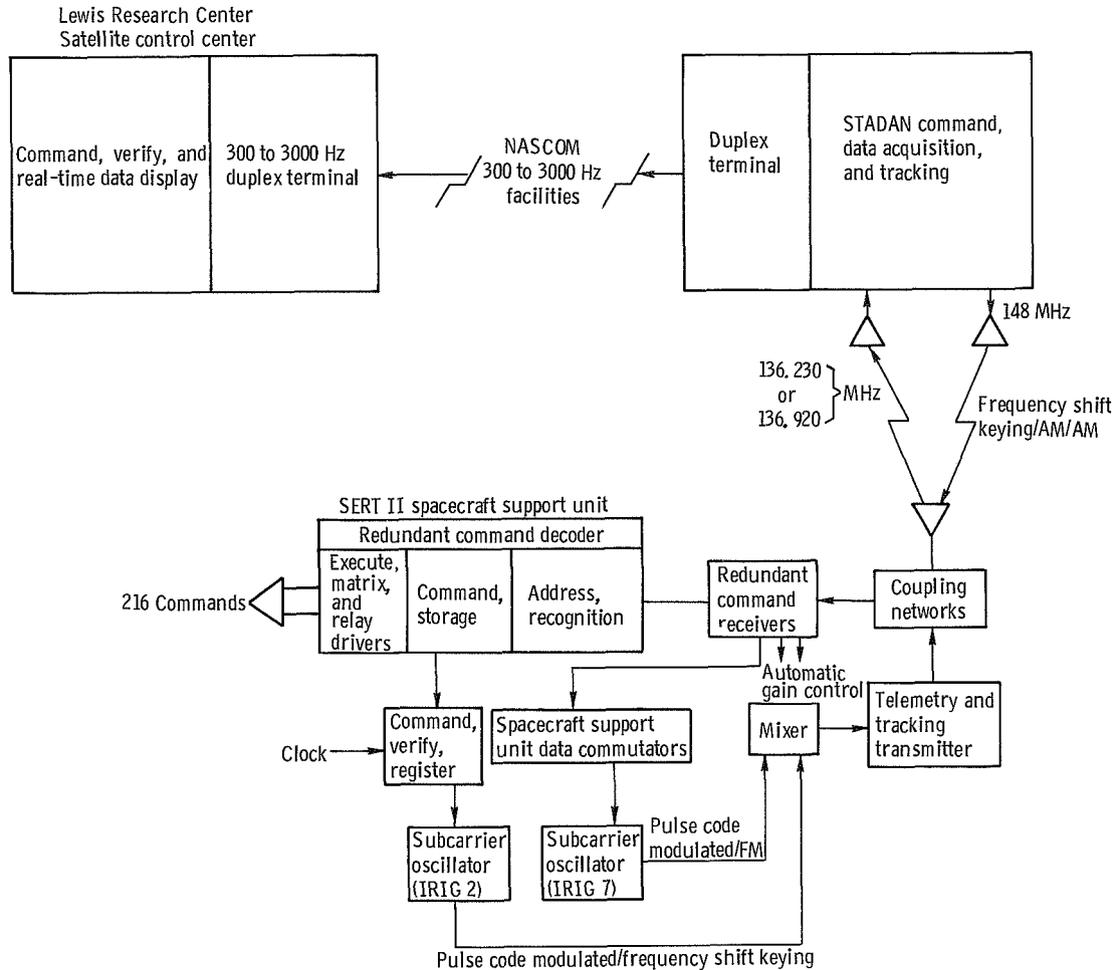


Figure 13. - Command system flow diagram.

Antenna system. - A circularly polarized turnstile configuration of four monopole antennas with associated duplexers and hybrids is used as the common telemetry command antenna system.

Experiments

Thruster. - The general configuration of the mercury bombardment ion thruster is shown in figure 14. The thruster assembly includes the propellant storage, feed system, and neutralizer (ref. 8). Permanent magnets are employed to create the longitudinal magnetic fields. The feed system is a positive pressure type using gas behind a diaphragm to force the mercury from the reservoir. Both the thruster cathode and the neutralizer are plasma discharge devices utilizing hollow cathodes.

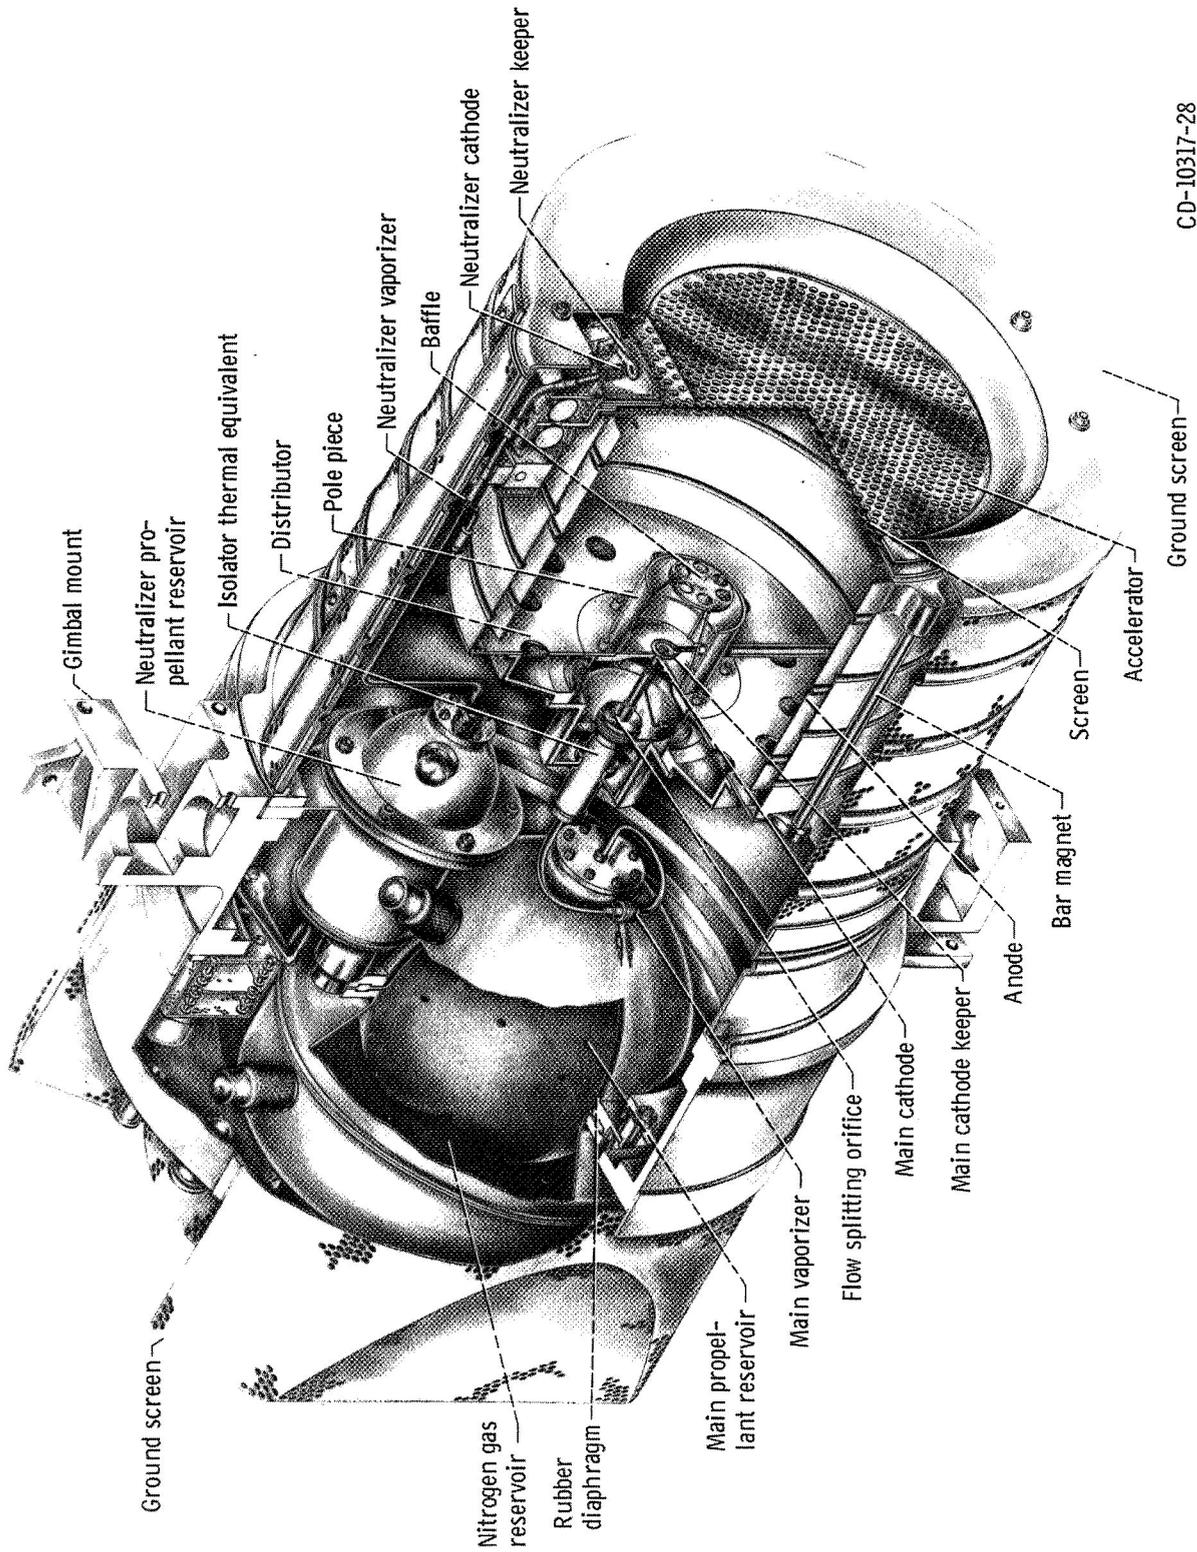

CD-10317-28

Figure 14. - SERT-II thruster.

The thruster requires 1000 watts of power and produces 6.2 millipounds of thrust when operated at the rated 250 milliampere ion beam current and 3000 volts dc net accelerating potential. The design operating point of the thruster is 89 percent power efficiency and 76 percent propellant utilization, including neutralizer, at a specific impulse of 4240 seconds. Each of the two ion thruster systems weighs 9 kilograms and carries 15 kilograms of mercury propellant.

Power conditioning. - The power conditioner (ref. 7) takes electrical energy directly from the thruster portion of the solar array and conditions it to meet the requirements of the thruster. Power requirements of the thruster are maintained over a solar array input voltage range of 54 to 75 volts. Average efficiency is 87 percent at 60 volts input with the thruster operating at 250-milliampere beam current.

The packaging configuration utilized for the power conditioning is open-to-vacuum construction as opposed to hermetic sealing. Unencapsulated magnetic components are used, eliminating the need for void-free encapsulation. Each of the two power conditioners weighs 14.8 kilograms and is 26.6 by 51 by 17.8 centimeters. The operating temperature range is 0^o to 49^o C.

The all solid state transistor type inverters operate at 8 kilohertz and provide the nine power supply requirements of the thruster including the necessary control loops and telemetry outputs. A neutralizer bias supply which is one of the thruster experiments is also provided. Each of the individual power supplies has the capability of withstanding shorts between any power conditioner output terminals and operating in a short circuited condition. Overload shutdown and input voltage undervoltage shutdown are also provided.

Beam probe experiment. - It is required that the thruster beam plasma potential with respect to the spacecraft be measured. Because of the high efflux of the plasma accelerated from the thruster and the consequent wear on the probe filament, a sweeping type emissive probe is required (ref. 5). The probe momentarily samples the beam potential and then returns to a position out of the beam.

When the beam probe is commanded to sweep, the probe electronics are automatically turned on to provide the necessary signal conditioning. The data are transmitted to the ground station in real time.

Each thruster has its own beam probe and actuator mounted on the thruster gimbal ring assembly.

Space probe experiment. - In order to evaluate the spacecraft potential during ion thruster operation, a space probe (ref. 5) is required to determine the spacecraft potential with respect to ambient space plasma potential. It must be measured at a point unaffected by the spacecraft plasma sheath and is, therefore, mounted on an isolated 1.525 meter boom. The boom is designed to deploy into the space plasma on the leading edge of the spacecraft. This separation serves to minimize spacecraft effects.

Surface contamination experiment. - The object of the surface contamination experi-

ment (ref. 6) is to determine if contamination exists in the vicinity of operating thrusters. This experiment was formulated to determine the compatibility of solar cells to products generated by electric thrusters.

Each surface contamination experiment (one for each thruster) consists of two cell assemblies, one hot and one cold. Both are thermally isolated from the structure and located near the ion beam.

The solar cells are located directly facing the Sun and produce their own signal (voltage), which is proportional to the intensity of sunlight transmitted through the contaminant coating on the surface of the cell assemblies.

Miniature electrostatic accelerometer experiment. - The object of this experiment is to obtain an accurate measure of the thrust imparted to the spacecraft during the mission. There are four modes of ion thruster operation of particular interest: thruster off, 30 percent beam, 80 percent beam, and 100 percent beam. The accelerometer output permits an accurate determination of these levels.

The accelerometer (ref. 9) permits instantaneous measurement of the thrust in real time. This measurement is provided from the accelerometer electronics in both analog (coarse) and digital (accurate) form.

Radiofrequency interference experiment. - The need for identifying the type of RF noise generated by an ion bombardment thruster system has resulted in the RFI experiment. The experiment receives predetermined frequency bands and establishes the power levels at these frequencies. A wideband antenna which views the ion beam of either thruster is required to receive these signals. Frequency bands, which have been selected, reflect spacecraft communication systems design for application in future deep space missions. The frequency bands are 300 to 700 megahertz, 1680 to 1720 megahertz, and 2090 to 2130 megahertz.

Reflector erosion experiment. - The reflector erosion experiment determines the degradation of a reflector surface in near Earth orbit. The optical degradation caused by the impact of micrometeoroids is measured as a change, during the course of the mission, of the temperature of a polished plate. Since the disk is oriented toward the Sun, with a relatively constant thermal input, the temperature shift of the disk isolated from the spacecraft is a direct indication of optical degradation.

CONCLUDING REMARKS

The SERT II program was required to provide a long life test of an electric thruster, obtain operational experience in this new method of propulsion, and measure the characteristics of electric thrusters as they affected the design of future electrically propelled spacecraft.

The satellite consists of a spacecraft support unit in which are concentrated the telemetry and command functions, ac and dc power conversion equipment, and most switching and housekeeping functions as well as control moment gyros. The principal experiments, two ion thrusters, each with its own specialized power conditioning, together with subsidiary experiments to closely monitor the characteristics of the thrusters, are mounted in the spacecraft, which bolts to the spacecraft support unit. The subsidiary experiments comprise beam probes and a space probe, radiofrequency interference, miniature electrostatic accelerometer, contamination cells, and reflector erosion unit.

The Agena launch vehicle provides proper moments of inertia for gravity gradient attitude control and supports the solar array and spacecraft - spacecraft support unit combination. The resulting satellite represents a simple, low-cost solution to the basic requirements laid down for the SERT II mission. To date, the spacecraft has performed satisfactorily and preliminary data indicate that all mission objectives will be met.

Lewis Research Center,
National Aeronautics and Space Administration,
Cleveland, Ohio, July 13, 1970,
704-00.

REFERENCES

1. Stuhlinger, Ernst: Ion Propulsion for Space Flight. McGraw-Hill Book Co., Inc., 1964.
2. Zola, Charles L.: Interplanetary Probe Missions with Solar-Electric Propulsion Systems. NASA TN D-5293, 1969.
3. Mullin, J. P.; Barber, T.; and Zola, C.: A Survey of Solar Powered Electric Propulsion for Automated Missions. Paper 68-1120, AIAA, Oct. 1968.
4. Rulis, Raymond J.: Design Considerations and Requirements for Integrating an Electric Propulsion System into the SERT II and Future Spacecraft. NASA TM X-52853, 1970. (Also paper presented at the 8th AIAA Elec. Prop. Conf., Stanford, Calif., Aug. 31 - Sept. 2, 1970.)
5. Jones, Sanford G.; Staskus, John V.; and Byers, David C.: Preliminary Results of SERT II Spacecraft Potential Measurements Using Hot Wire Emissive Probes. NASA TM X-52856, 1970. (Also paper presented at the 8th AIAA Elec. Prop. Conf., Stanford, Calif., Aug. 31 - Sept. 2, 1970.)

6. Staskus, John V. ; and Burns, Robert J. : Depositions of Ion Thruster Effluents on SERT II Spacecraft Surfaces. NASA TM X-52860, 1970. (Also paper presented at the 8th AIAA Elec. Prop. Conf. , Stanford, Calif. , Aug. 31 - Sept. 2, 1970.)
7. Bagwell, James W. ; Hoffman, Anthony C. ; Leser, Robert J. ; Reader, Karl F. ; Stover, John B. ; and Vasicek, Richard W. : Review of SERT II Power Conditioning. NASA TM X-52858, 1970. (Also paper presented at the 8th AIAA Elec. Prop. Conf. , Stanford, Calif. , Aug. 31 - Sept. 2, 1970.)
8. Kerslake, William R. ; Byers, David C. ; Rawlin, Vincent K. ; Jones, Sanford G. ; and Berkopcec, Frank D. : Flight and Ground Performance for the SERT II Thruster. NASA TM X-52848, 1970. (Also paper presented at the 8th AIAA Elec. Prop. Conf. , Stanford, Calif. , Aug. 31 - Sept. 2, 1970.)
9. Neiberding, William C. ; Lesco, David J. ; and Berkopcec, Frank D. : Comparative In-Flight Thrust Measurement of the SERT II Thruster. NASA TM X-52839, 1970. (Also paper presented at the 8th AIAA Elec. Prop. Conf. , Stanford, Calif. , Aug. 31 - Sept. 2, 1970.)
10. Gold, Harold; Rulis, Raymond J. ; Maruna, Frank A. , Jr. ; and Hawersaat, William H. : Description and Operation of Spacecraft in SERT I Ion Thrustor Flight Test. NASA TM X-1077, 1965.
11. Cybulski, Ronald J. ; Shellhammer, Daniel M. ; Lovell, Robert R. ; Domino, Edward J. ; and Kotnik, Joseph T. : Results from SERT I Ion Rocket Flight Test. NASA TN D-2718, 1965.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
WASHINGTON, D. C. 20546
OFFICIAL BUSINESS

FIRST CLASS MAIL



POSTAGE AND FEES PAID
NATIONAL AERONAUTICS AND
SPACE ADMINISTRATION

POSTMASTER: If Undeliverable (Section 158
Postal Manual) Do Not Return

"The aeronautical and space activities of the United States shall be conducted so as to contribute . . . to the expansion of human knowledge of phenomena in the atmosphere and space. The Administration shall provide for the widest practicable and appropriate dissemination of information concerning its activities and the results thereof."

—NATIONAL AERONAUTICS AND SPACE ACT OF 1958

NASA SCIENTIFIC AND TECHNICAL PUBLICATIONS

TECHNICAL REPORTS: Scientific and technical information considered important, complete, and a lasting contribution to existing knowledge.

TECHNICAL NOTES: Information less broad in scope but nevertheless of importance as a contribution to existing knowledge.

TECHNICAL MEMORANDUMS: Information receiving limited distribution because of preliminary data, security classification, or other reasons.

CONTRACTOR REPORTS: Scientific and technical information generated under a NASA contract or grant and considered an important contribution to existing knowledge.

TECHNICAL TRANSLATIONS: Information published in a foreign language considered to merit NASA distribution in English.

SPECIAL PUBLICATIONS: Information derived from or of value to NASA activities. Publications include conference proceedings, monographs, data compilations, handbooks, sourcebooks, and special bibliographies.

TECHNOLOGY UTILIZATION PUBLICATIONS: Information on technology used by NASA that may be of particular interest in commercial and other non-aerospace applications. Publications include Tech Briefs, Technology Utilization Reports and Notes, and Technology Surveys.

Details on the availability of these publications may be obtained from:

SCIENTIFIC AND TECHNICAL INFORMATION DIVISION
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
Washington, D.C. 20546